

# CUSTOM SEAT CHART

Seat Part #:

---


Cover Full or Mod Cover

---

Driver is using HANS device?

Yes

No

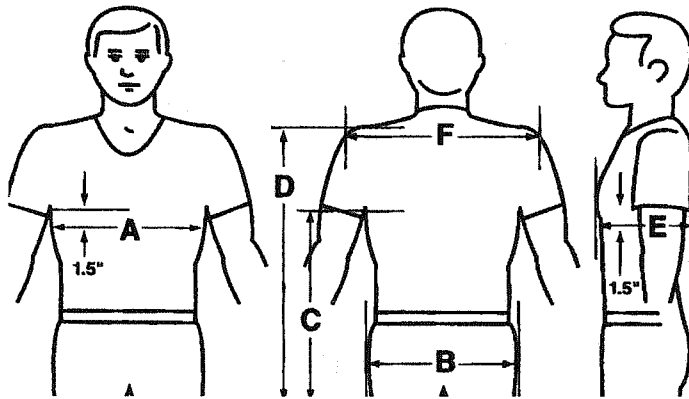

Because we manufacture our seats in house we can easily custom fit a seat for you if one of our standard sizes doesn't fit. To order a custom seat, please follow the instructions at side. All measurements must be taken in absolute straight lines, do not follow the curvature of the body

- A - Width of Chest - Width of seat at rib support. Have driver stand with arms raised slightly, measure side-to-side 1 1/2" below arm pits
- B - Width of Hips - Width of seat. Have driver sitting on bench or floor. Use cinder blocks or equivalent on each side of hips at a comfortable but snug pressure. Measure between blocks.
- C - Height of Armpit - Height of rib supports. With driver sitting measure from flat surface to armpit. Driver's shoulders should be completely straight.
- D - Height of Shoulders - Height of shoulder harness opening. With driver sitting in same position as C measure from flat surface to top of shoulder
- E - Chest Depth - Length of Rib Supports. Driver standing with back against wall, measure from wall to front of chest 1 1/2" below armpit. We will need Driver's Height and Weight.
- F - Width of Shoulders - Outside to Outside. Measure 2" down from top of shoulder

A. \_\_\_\_\_

D. \_\_\_\_\_

Height: \_\_\_\_\_

B. \_\_\_\_\_

E. \_\_\_\_\_

C. \_\_\_\_\_

F. \_\_\_\_\_

Weight: \_\_\_\_\_